


45° - 12'-0" PYRAMID


**** SHOP NOTE ****
 1K1, 1K2, 1K3 & 1K4 UNITS HAVE DIE ANGLAR BATTENS FACTORY ATTACHED (SEE DETAIL)
 1K1, 1K2 & 1K5 UNITS HAVE INTERIOR DIE ANGLAR BATTENS FACTORY ATTACHED (SEE DETAIL)
 EXTERIOR ANGLAR BATTEN DRILLED 1" FROM TOP & 5" FROM BOTTOM
 EXTERIOR DIE BATTEN DRILLED 5" FROM TOP

**** INSTALLER NOTE ****
 ORDER OF FIELD ASSEMBLY
 1 2 3 4 5 6 7 8
 1K1 1K2 1K3 1K4 1K5 1K6 1K5 1K4
 NOTE: TIGHTEN ALL SCREW BOLTS AND ATTACH INTERIOR PLATE BEFORE INSTALLING THE LAST 1K6 UNIT



UNIT	FACTORY INSTALLED INTERIOR BATTEN	1" TUBE AT TOP OF UNIT
1K1	2" DIE AND ANGLAR HP BATTEN	3" LG
1K2	2" DIE AND ANGLAR HP BATTEN	3" LG
1K3	ANGLAR HP BATTEN	3" LG
1K4	ANGLAR HP BATTEN	3" LG
1K5	2" DIE BATTEN	2 7/8" LG
1K6	NONE	2 7/8" LG

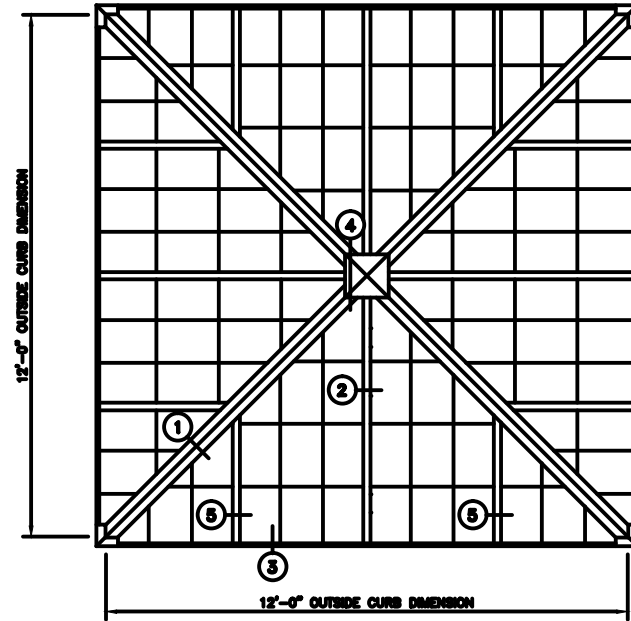

PYRAMID PLAN
 NOTE: SHIPPED IN 8 UNITS

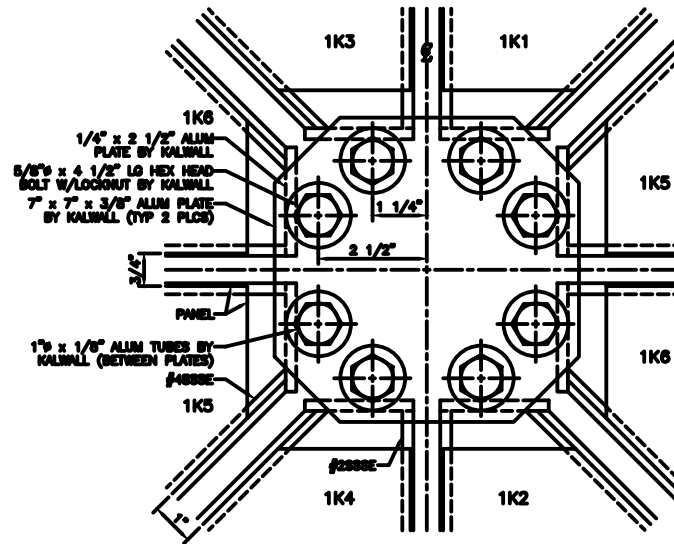

AA PEAK PLAN VIEW



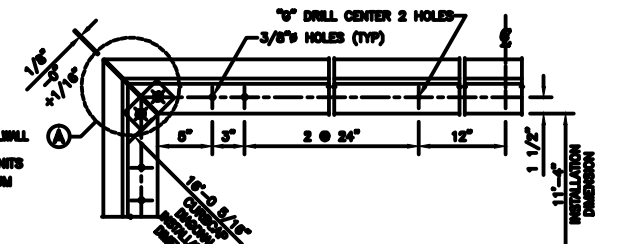
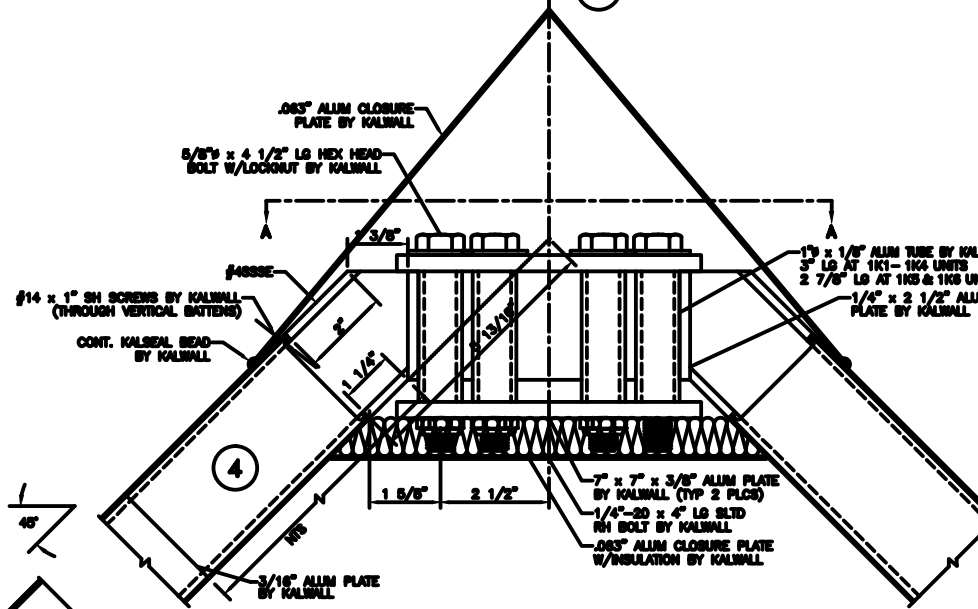


CURB CAP PLAN

CURB TYPE	FASTERER & SPACING
WOOD	#14 R.H. S.S. - 4" LG. 24" O.C.
STEEL	#14 R.H. S.S. - 1" LG. 24" O.C.
CONCRETE	1/4" x 3 1/4" POWER STUD ON #4001 24" O.C.


NOT SUPPLIED BY KALWALL UNLESS INSTALLED BY KALWALL
 ALL FASTENERS TO BE IN HOLE 1/8" LARGER THAN FASTENER DIA.
 HOLE AT CENTER OF CURB TO BE SAME DIA. AS FASTENER

SUGGESTED FASTENING OF CURB CAP TO CURB

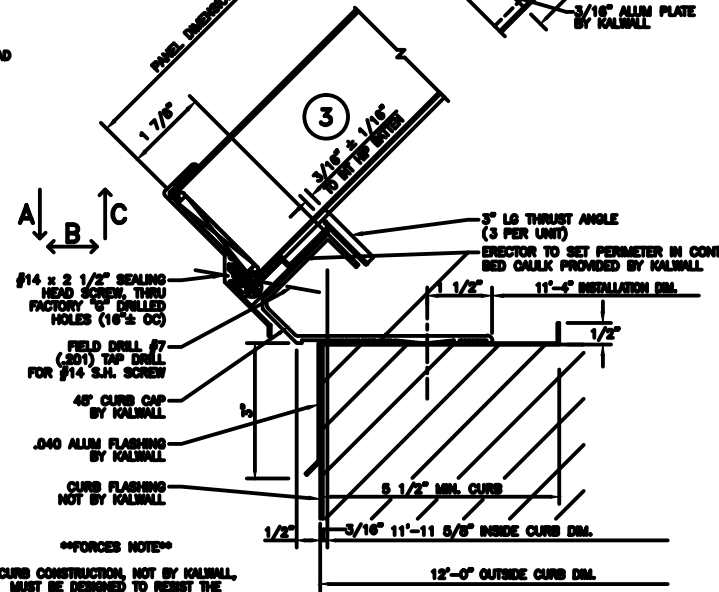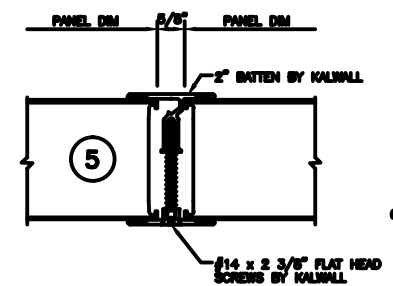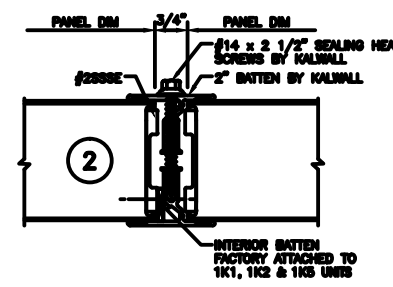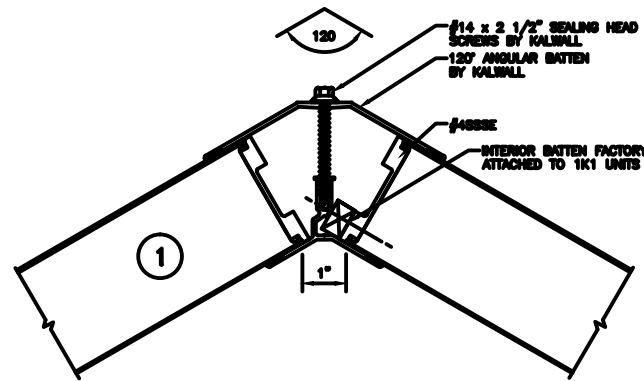

****FORCES NOTE****
 CURB CONSTRUCTION, NOT BY KALWALL, MUST BE DESIGNED TO RESIST THE FOLLOWING FORCES PRODUCED BY
 A: PEF LIVE LOAD
 A: PEF WIND LOAD
 A: PEF SNOW LOAD
 A: PEF DRIFT LOAD

A: _____ LBS/SIDE
 B: _____ LBS/SIDE
 C: _____ LBS/SIDE



DETAIL A



SECTION B-B

KALWALL[®]
 high performance translucent building systems