27.25° - 4'-0" PYRAMID

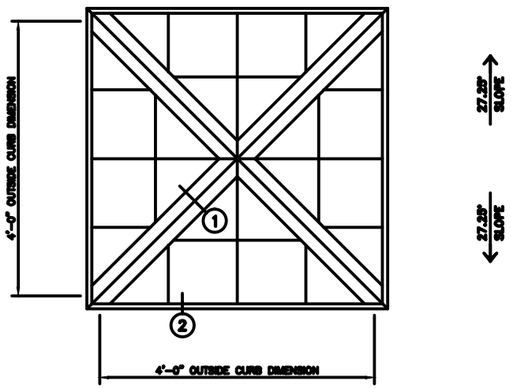

PYRAMID PLAN

NOTE: SHIPPED IN 1 UNIT

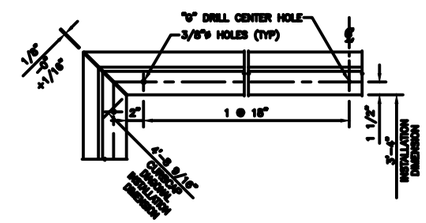

CURB CAP PLAN

SUGGESTED FASTENING OF CURB CAP TO CURB		
CURB TYPE	FASTENER *	SPACING
WOOD	#14 R.H. S.S. – 4" LG.	24" O.C.
STEEL	#14 R.H. S.S. – 1" LG.	24" O.C.
CONCRETE	1/4" X 3 1/4" POWER STUD OR #7401	24" O.C.

*NOT SUPPLIED BY KALWALL UNLESS INSTALLED BY KALWALL

ALL FASTENERS TO BE IN HOLE 1/8" LARGER THAN FASTENER DIA.
HOLE AT CENTER OF CURB TO BE SAME DIA. AS FASTENER

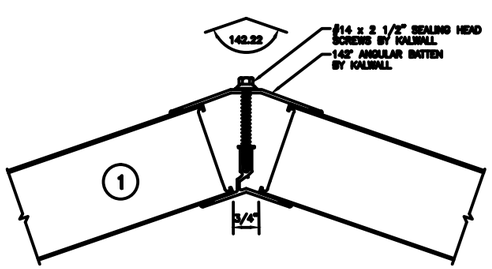

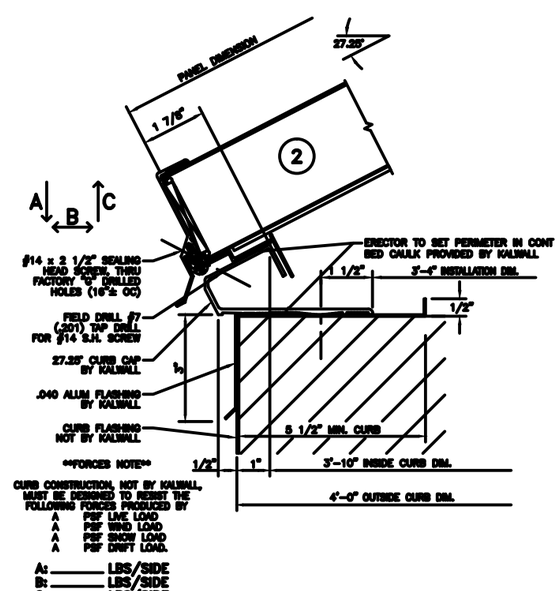

FORCES NOTE

CURB CONSTRUCTION, NOT BY KALWALL, MUST BE DESIGNED TO RESIST THE FOLLOWING FORCES PRODUCED BY

A PSF LIVE LOAD
A PSF WIND LOAD
A PSF SNOW LOAD
A PSF DRIFT LOAD.

A: _____ LBS/SIDE
B: _____ LBS/SIDE
C: _____ LBS/SIDE

KALWALL®

high performance translucent building systems